




Stack Parker G61 EV

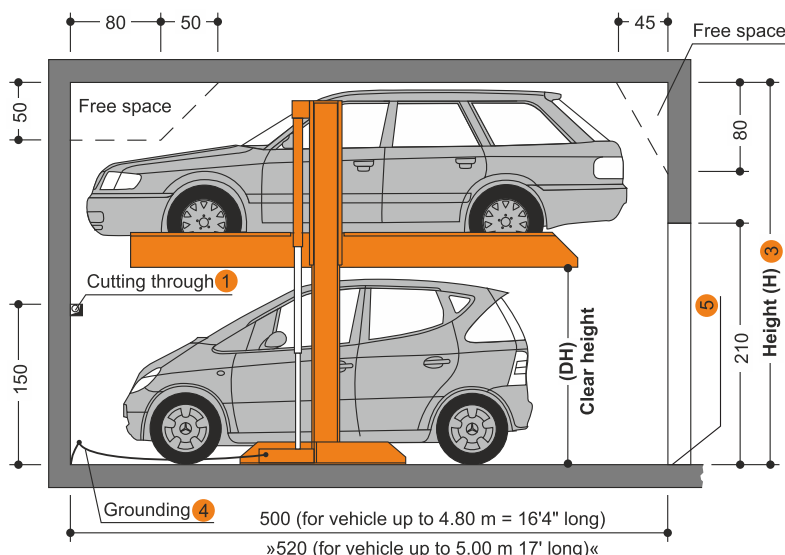

Before lowering the platform, the vehicle parked in the lower parking space must be driven off.

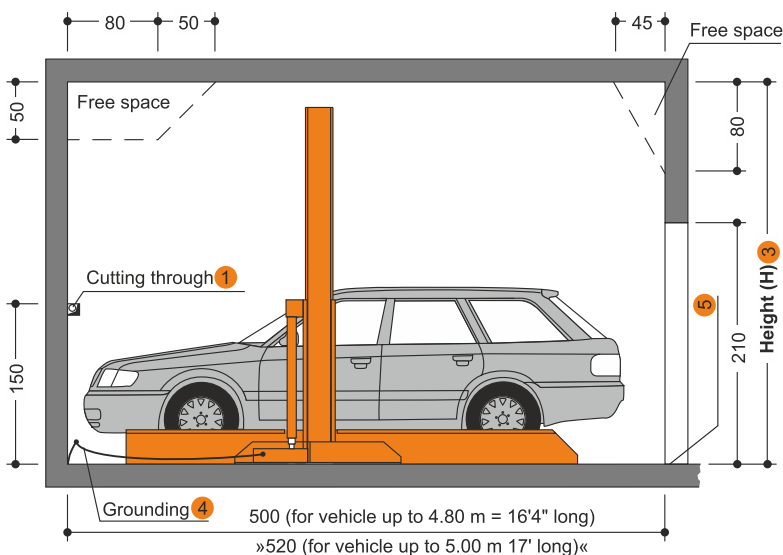

Garage with door in front of the car parking system

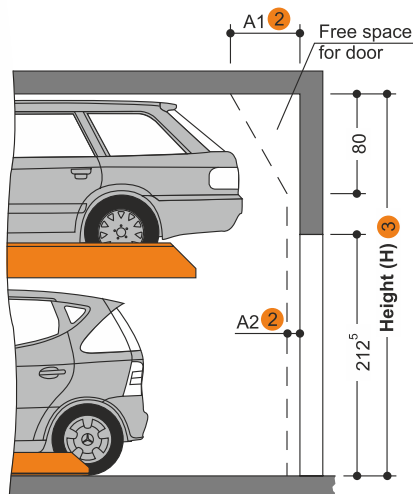

Notes

- 1 For dividing walls: cutting through 10 x 10 cm (for pipes).
- 2 Dimensions A1, A2 and A3 must be coordinated with the door supplier.
- 3 If the total height is greater, the max. vehicle height for the upper parking space increases accordingly.
- 4 Potential equalization from foundation grounding connection to system.
- 5 10 cm wide yellow-black marking must be applied by the customer to the edge of the platform in the access area to mark the danger zone in front of the supporting surface of the upper platform edge (see »Load Plan«, Page 3).

Product Data Stack Parker G61 EV

Dimensions:

All space requirements are minimum finished dimensions. Tolerances for space requirements ± 3 Dimensions in cm. EB (single platform) = 2 vehicles

Type	H	DH**
G61EV-160	320	160
G61EV-170	330	170
G61EV-180*	340	180
G61EV-190	350	190
G61EV-200	360	200
G61EV-210*	370	210

*=standard type **=without car

Suitable for:


Standard passenger car and station wagon.
Height and length according to contour

Type	H	Car height	
		Upper	Lower
G61EV-160	320	150	150
G61EV-170	330	150	160
G61EV-180*	340	150	170
G61EV-190	350	150	180
G61EV-200	360	150	190
G61EV-210*	370	150	200

* = standard type

Width	1.80 m (PW 2.2 m)
Weight	max. 2000 kg
Wheel load	max. 500 kg

Clearance profile

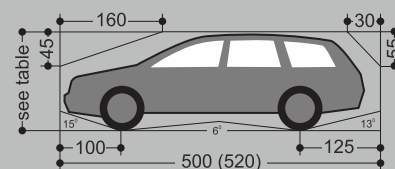

KLAUS
multiparking

KLAUS Multiparking Systems Pvt. Ltd.
NKB House, Survey No. 98, Plot No. 14,
Bhusari Colony, Kothrud,
Pune 411 038 INDIA

Phone +91-20-6681 5800

E-mail info@klausmultiparking.in
Website www.klausindia.com

Page 1
- Section
- Dimensions
- Car data

Page 2
- Width
dimensions


Page 3
- Approach
- Load plan
- Installation
- Electrical
installation

Page 4
- Technical
data
- To be
performed
by the
customer
- Description

Width for basement garage


Dividing walls

Single platform (EB)




Usable platform width	B ₁
200	230
210	240
220*	250
230	260
240	270
250	280

Double arrangement (2 x EB)



Usable platform width	B ₁
200	460
210	480
220*	500
230	520
240	540
250	560

Triple arrangement (3 x EB)




Usable platform width	B ₁
200	690
210	720
220*	750
230	780
240	810
250	840

Driveway in
accordance with
local regulations


Columns in system zone

Single platform (EB)




Usable platform width	B ₂	B ₃
200	225	220
210	235	230
220*	245	240
230	255	250
240	265	260
250	275	270

Double arrangement (2 x EB)



Usable platform width	B ₂	B ₃
200	455	450
210	475	470
220*	495	490
230	515	510
240	535	530
250	555	550

Triple arrangement (3 x EB)

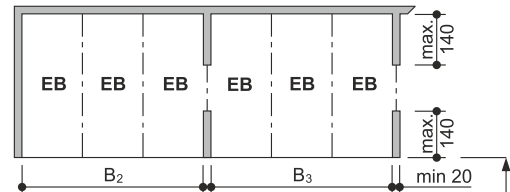


Usable platform width	B ₂	B ₃
200	685	680
210	715	710
220*	745	740
230	775	770
240	805	800
250	835	830

Driveway in
accordance with
local regulations


Columns outside system zone

Single platform (EB)




Usable platform width	B ₄	B ₅
200	220	210
210	230	220
220*	240	230
230	250	240
240	260	250
250	270	260

Double arrangement (2 x EB)



Usable platform width	B ₄	B ₅
200	450	440
210	470	460
220*	490	480
230	510	500
240	530	520
250	550	540

Triple arrangement (3 x EB)

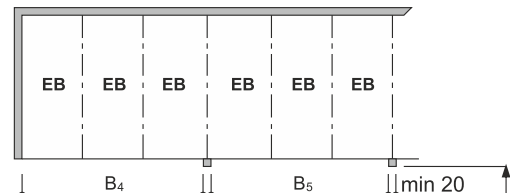


Usable platform width	B ₄	B ₅
200	680	670
210	710	700
220*	740	730
230	770	760
240	800	790
250	830	820

Driveway in
accordance with
local regulations

Widths for garage with door in front of car parking system

Single platform (EB)

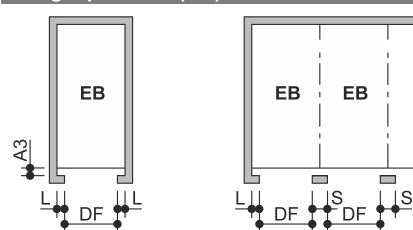


A₃ = Door width
space required

All round door
dimensions require
coordination between
door supplier and
local agency of
KLAUS Multiparking

Usable platform width	Door entrance width DF	L	S
200	207 ⁵	11 ²	22 ⁵
210	217 ⁵	11 ²	22 ⁵
220*	227⁵	11²	22⁵
230	237 ⁵	11 ²	22 ⁵
240	250	11 ²	22 ⁵
250	250	15	30

Double arrangement (DB)

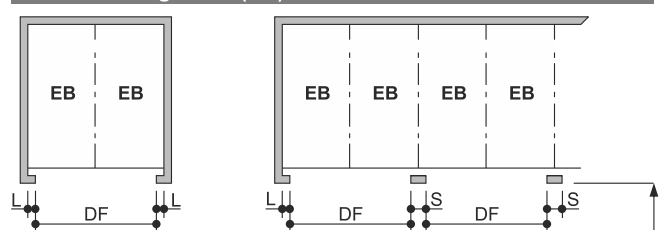

Usable platform width	Door entrance width DF	L	S
200	415	22 ⁵	45
210	435	22 ⁵	45
220*	483⁵	22⁵	45
230	475	22 ⁵	45
240	500	20	40
250	520	20	40

Driveway in
accordance with
local regulations

* = standard width (parking space width 2.30 m)

Please note:



End parking spaces are generally more difficult to drive into. Therefore, we recommend our wider platforms for end parking spaces. Parking larger vehicles on standard width platforms may make getting into and out of the vehicle difficult. This depends on the type of the vehicle, approach and above all, on the driver's skill.


Page 1
- Section
- Dimensions
- Car data

Page 2
- Width
dimensions

Page 3
- Approach
- Load plan
- Installation
- Electrical
installation

Page 4
- Technical
data
- To be
performed
by the
customer
- Description


Approach

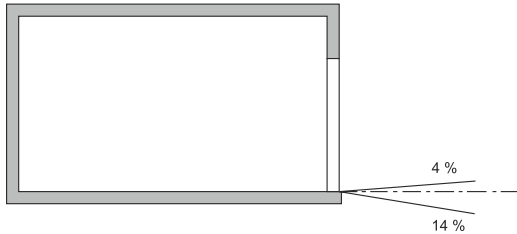

! The illustrated maximum approach angles must not be exceeded. Incorrect approach angles will cause serious maneuvering and positioning problems on the parking system for which the local agency of KLAUS Multiparking accepts no responsibility.

Load plan

Forces in kN (static loads)

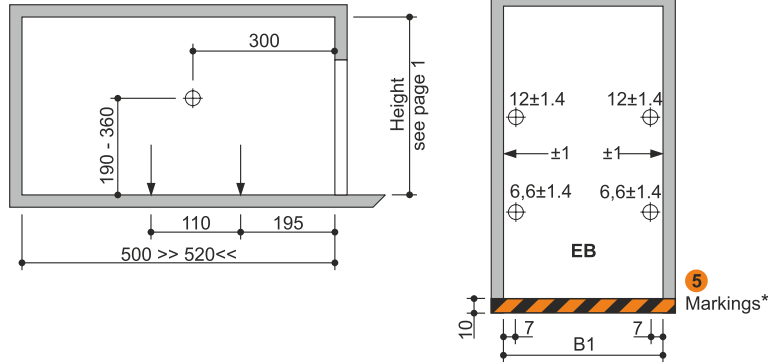


! Units are doweled to the floor.
Drilling depth: approx. 9 cm to 15 cm. Floor and walls are to be made of concrete (quality minimum C20/25).

* = Colors used in this illustration are representative

Special foundations are required with asphalt floor or paving blocks.


Installation data

Free space for longitudinal and vertical ducts (e.g. ventilation)

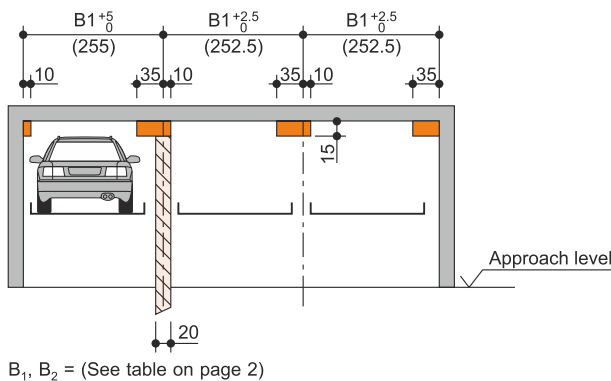

B₁, B₂ = (See table on page 2)

Free space for vertical pipelines, ventilation branch canals
 Free space for horizontal ducting

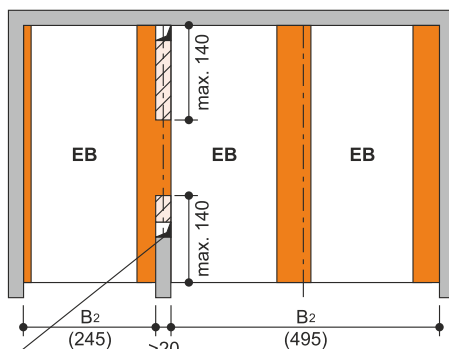


Example for ventilation branch canal and/or vertical pipelines.

Free space only applicable if vehicle is parked forwards = FRONT FIRST and driver's door on the right side

() = Dimensions in brackets illustrate an example for usable platform width 220 cm.

Electrical installation

Installation diagram

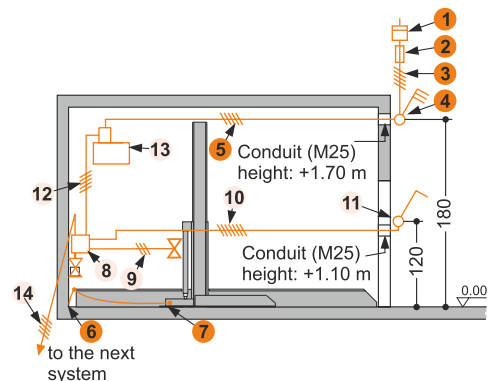

Electrical data (to be performed by the customer)

No.	Quantity	Description	Position	Frequency
1	1	Electrical meter	in the supply line	
2	1	N.A.		
3	1	Power supply line (5 x 2.5 mm ² , copper 3 PH + N + PE) with marked wire and protective conductor.	from electrical meter to main power point	1 per unit
4	1	Main power point: 4 pole RCBO (or MCB + ELCB), 16 Amp IDN (sensitivity/leakage current) 100 mA	defined at plan evaluation near to hydraulic unit	1 per unit
5	1	Power supply line (5 x 2.5 mm ² , copper 3 PH + N + PE) with marked wire and protective conductor.	from main power point to hydraulic unit	1 per unit
6	every 10 m	Foundation earth connector	corner pit floor	
7	1	Equipotential bonding from foundation earth connector to the system		1 per system

Electrical data (included in delivery of KLAUS Multiparking)

No.	Description
8	Terminal box
9	Control line 3 x 0.75 mm ² (PH + N + PE)
10	Control line 5 x 0.75 mm ² with marked wire and protective conductor
11	Operating device
12	Control line 5 x 0.75 mm ² with marked wire and protective conductor
13	Hydraulic unit 1.5 kW, three-phase current, 415 V / 50 Hz
14	Control line 5 x 0.75 mm ² with marked wire and protective conductor

Technical data

Range of application

Generally parking system is suitable for small/big length car for which the system is adjusted at the time of installation. In case of different car is to be parked, system adjustment/confirmation from KLAUS Multiparking shall be required.

Environmental conditions

Environmental conditions for the area of multiparking systems: Temperature range 5°C to +40°C. Maximum outside temperature of +45°C.

If the local circumstances differ from the above, please contact KLAUS Multiparking.

To be performed by the customer

Safety fences

Any constraints that may be necessary in order to provide protection, for pathways directly in front, next to or behind the unit. This is also, valid during construction.

Numbering of parking spaces

Consecutive numbering of parking spaces.

Building services

- Lighting, ventilation, fire extinguishing and fire alarm systems.
- Signages for parking guidance, flooring, pedestals, site painting.

Marking

The marking that identifies the danger area at entrance of parking platform should be made on the floor, with yellow and black stripes.

Wall cutting

Any necessary wall cutting according to page 1.

Electrical supply to the main power point

3 phase, 415 V (±10%) 50 Hz (±2%) 4 wire (3 PH + N + PE) electrical supply to the main power point and the control wire line (5 x 2.5 mm², copper 3 PH + N + PE) with marked wire and protective conductor must be provided by customer during installation.

Railings

If there are traffic routes next to or behind the installations, railings must be installed by the customer. Railings must also be in place during construction.

Description

General description

This system provides dependent parking spaces for 2 cars one on top of the other. The lower vehicle is parked directly on the floor. The vehicle parked on the bottom must be driven out before lowering the platform.

The upper vehicle is parked on the platform when it is resting on the floor with the wheels touching the wheel-stopper-cross member.

The user is responsible for proper positioning of the vehicle on platform/floor.

Operation via operating device with hold-to-run-device using master keys.

The operating elements are usually mounted either in front of the column or on the outside of the door frame.

Operating instructions are attached to each operator's box stand.

For garages with doors at the front of the parking system, the special dimensional requirements have to be taken into account.

Multiparking systems consist of

- 2 steel pillars with base plates (mounted on the floor)
- 2 sliding platforms (mounted on to the steel pillars with sliding bearings)
- 1 platform
- 1 mechanical synchronization control system (to ensure synchronous operation of the hydraulic cylinders while lowering and lifting the platform)
- 1 hydraulic cylinder
- 1 automatic hydraulic safety valve (prevents accidental lowering of the platform)
- Connecting elements, bolts, nuts, etc.

Platforms consist of

- Platform base sections
- Wheel-stop cross member
- Access strip
- Side members
- Cross members
- Bolts, nuts, washers, distance tubes, etc.

Hydraulic system consists of

- Hydraulic cylinders
- Solenoid valves
- Hydraulic pipes
- Hydraulic pipe fittings
- High-pressure hoses

Electric system consists of

- Operating device (Emergency Stop, lock, 1 master key per parking space)
- Terminal box at wall valve
- Electromagnetic locking device

Hydraulic unit consists of

- Hydraulic power unit (low-noise, installed onto a console with a metal mounting)
- Hydraulic oil reservoir
- Oil filling
- Internal geared wheel pump
- 3-phase-AC-motor (1.5 kW / 415 V, 50 Hz)
- Contactor (with thermal over current relay and control fuse)
- Pressure gauge
- Pressure relief valve
- Hydraulic hoses

We reserve the right to change these specifications without prior notice.

KLAUS Multiparking reserves the right in the course of the technical progress to use newer or other technologies, system, processes, procedures or standards in the fulfillment of their obligations other than those originally offered.